




Model CFL

Low cost item (Conductive plastic)


■ Standard dimensions



Model CFL200

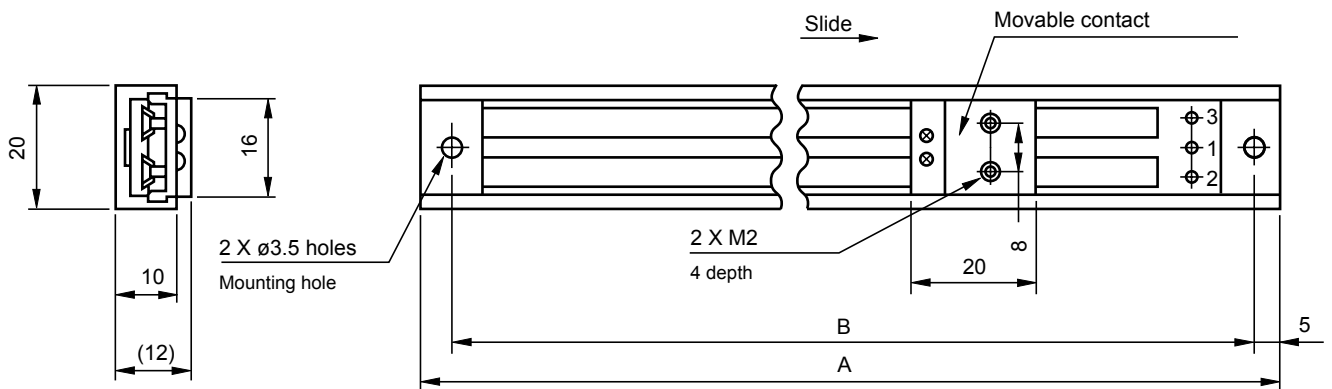

Terminal Connection Diagram



■ Standard Model Nos.

- CFL200 stroke Approx. 203mm
- CFL300 stroke Approx. 303mm
- CFL400 stroke Approx. 403mm
- CFL500 stroke Approx. 505mm
- CFL1000 stroke Approx. 1,005mm

■ General Specifications

Model No.		CFL200	CFL300	CFL400	CFL500	CFL1000
Dimension	A 1	250mm	350mm	450mm	550mm	1,050mm
	B 0.5	250mm	340mm	440mm	540mm	1,040mm
Standard Resistance Values		2k, 5k, 10k (Ω)	5k, 10k, 20k	5k, 10k, 20k 50k, 100k (Ω)	5k, 10k, 20k 50k, 100k (Ω)	10k, 20k, 50k 100k, 200k 500k (Ω)
Total Resistance Tolerance	Standard Class	±20% (M)				
	Precision Class	±10% (K)				
Independent Linearity Tolerance	Standard Class	±0.5%				
	Precision Class	±0.1%				
	Super-Precision Class	±0.05%				-
Output Smoothness		Within 0.1% against input voltage				
Contact Resistance Variation		Within 2% C.R.V.				
Power Rating		2.0W	2.5W	3.0W	4.0W	6.0W
Electrical Stroke		200±1mm	300±1mm	400±1mm	500±1mm	1,000±1mm
Mechanical Stroke (See within note)		Approx. 203mm	Approx. 303mm	Approx. 403mm	Approx. 505mm	Approx. 1005mm
Insulation Resistance		Over 1,000M Ω at 500V.D.C.				
Dielectric Strength		1 minute at 500 V.A.C.				
Friction		Within 0.2N (20gf)				
Max. Working Voltage		500V				
Resistance Temperature Coefficient		±400p.p.m./°C				
Life Expectancy		10,000,000 slider reciprocating motions				
Operating Temperature Range		-30°C ~ + 105°C				
Mass (Approx.)		70g	100g	130g	160g	300g

Note: The values of mechanical stroke are approximate ones, because of no mechanical stopper mounted at both ends. Whenever a movable contact operates at both ends, please be careful to operate it without leaving the track.

■ Special Specifications Available

Mechanical stops at both ends.

LEADERS IN SENSORS & HEAVY DUTY JOYSTICKS

ALThERIS bv

Scheveningseweg 15
2517 KS DEN HAAG
The Netherlands

+31 (0)70 3924421

+31 (0)70 3644249

Offices in : Benelux | Germany | France | UK | Italy | USA

www.altheris.com

sales@altheris.nl

ALThERIS
SENSORS & CONTROLS